

LADDERS

-DIRECT.com from the CLOW GROUP LTD.

www.ladders-direct.com sales@ladders-direct.com



By Appointment to
Her Majesty the Queen
Manufacturers of Access Equipment
Clow Group Ltd., Glasgow

London • Midlands • Belfast • Glasgow


Clow EN131:Professional Aluminium Single Section Ladder

The Clow EN131:Professional Single Section Ladder from Ladders-Direct.com features strong folding stabiliser bars, (on lengths over 3m), an automatic rung lock, heavy duty serrated "D" shaped rungs and robust box section stiles formed from high quality 6082, T6 grade aluminium alloy.

Fully tested and compliant with the all new EN131: Professional standard this ladder provides a maximum load of 150kg.

The strong box section stiles are specially designed with a recess to protect the rung ends. With deep 'D' type rungs for comfort and large angled PVC block safety feet supported by the folding stabiliser legs this is a strong and robust ladder suited to a wide range of commercial trades and environments.

Fully compliant with the European EN131:Professional Standard.

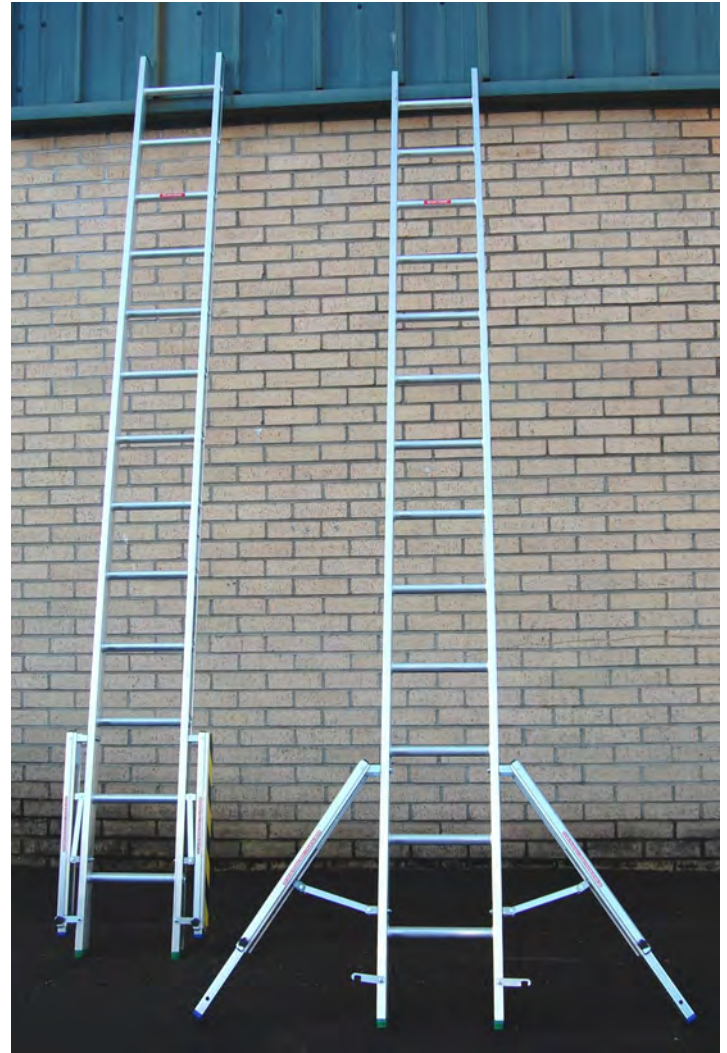

Clow Dual Section Extension Ladder to EN131:Professional

Code	Length	Maximum Standing Height *	Rungs	Weight
AEENS2.0	1.92m	0.99m	7	3.6kg
AEENS2.5	2.42m	1.47m	9	4.6kg
AEENS3.0	2.92m	1.95m	11	5.7kg
AEENS3.5	3.42m	2.43m	13	10.6kg
AEENS4.0	3.92m	2.92m	15	11.7kg
AEENS4.5	4.42m	3.40m	17	12.7kg
AEENS5.0	4.92m	3.88m	19	13.8kg
AEENS5.5	5.42m	4.37m	21	14.8kg

* Maximum standing height – when using a leaning ladder do not stand on the top three rungs to ensure maximum safety and stability.
Note that ladders used for access should project at least 1m above the landing point and be tied in to provide a secure handhold.

Reference: LD_AEENS_240724.pdf