

Clow Aluminium Roof Ladders

Clow Aluminium Roof Ladders are manufactured from light rectangular aluminium alloy with broad oval rungs at a 30° slope to provide a safe and comfortable foothold.

Underneath the stiles are aluminium bearers covered in rubber to ensure maximum depth in the interests of safety. All roof ladders are fitted with strong curved ridge hooks and rubber tyred wheels.

Clow Aluminium Roof Ladders are available either as Standard or Extending types.




Clow Standard Roof Ladders

Product Code	Size (inc. Ridge Hook)	No. of Rungs	Weight
OR12	3.66m/12'0"	12	10.7kg
OR14	4.27m/14'0"	15	12.1kg
OR16	4.88m/16'0"	17	13.1kg
OR18	5.49m/18'0"	20	14.6kg
OR20	6.10m/20'0"	22	15.6kg

The Clow Extending Roof Ladder is compact and easily transportable with a closed length of 2.9m, yet when extended can cover all roofs up to 6.6m in length.

The Clow Extending Roof Ladder is fitted with longitudinal pressure bars and heavy duty castors (one of which is rotatable through 360° for maximum manoeuvrability on the roof).

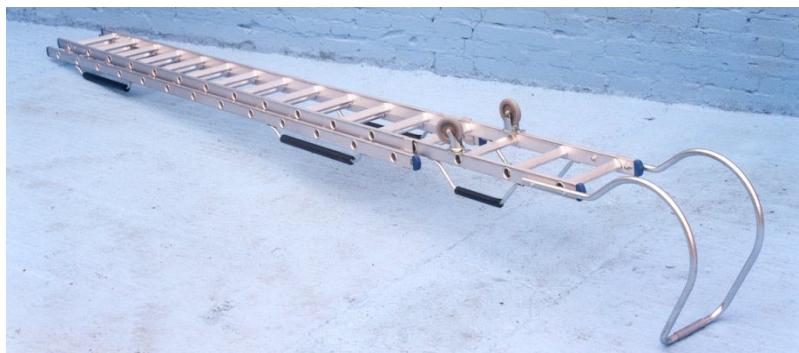

There is also an extension available for the above ladder, giving a maximum usable length of 9.4m (30'9"), attached to a main ladder by aluminium spigot and retained by screw and wingnut.

Clow Extending Roof Ladder

Product Code	Closed Length	Extended Length	Weight
ERL1	3.9m/12'8"	6.6m/21'6"	21.2kg
ERL2	Extension Length: 2.74m/9'0"		7.9kg