



Class 1 Aluminium Extension Ladder (Rope Operated)

This range of Class 1 Aluminium Extension Ladders are specifically designed to withstand the rigours and hazards of heavy duty use.

Fitted with the unique Clow 'D' shaped Safety Rung, the flat-topped rungs provide maximum comfort and safety. In addition, the heavy gauge box section stiles, complete with serrated edges offer a secure handhold and positive grip to walls, sills and gutters. Ladder hooks, designed to provide a smooth and secure extension action, are fitted as standard.

With a Class 1 rating these ladders support a maximum load of 175kg.

These Clow Class 1 Aluminium Extension Ladders are designed specifically for heavy duty use within tough and rigorous environments. Fitted with rope operation, these ladders can be easily extended with a smooth operation and a minimum amount of effort.


Other optional extras include: Wall Wheels, Pole Hoops and Automatic Safety Catches.

Class 1 Aluminium Dual Extension Ladder (Rope Operated)

Code	Closed Height	Extended Height	Rungs	Weight
ID4.0R	4.00m (13'0")	7.20m (23'5")	15	23.0kg
ID4.5R	4.40m (14'6")	8.10m (26'9")	17	25.0kg
ID5.0R	4.70m (15'3")	8.60m (28'6")	19	29.0kg
ID5.5R	5.40m (17'9")	9.90m (32'6")	21	36.0kg
ID6.0R	6.10m (20'2")	11.40m (37'5")	24	53.0kg

Class 1 Aluminium Triple Extension Ladder (Rope Operated)

Code	Closed Height	Extended Height	Rungs	Weight
IT4.0R	3.90m (12'10")	9.40m (30'10")	15	42.0kg
IT4.5R	4.40m (14'5")	10.90m (35'9")	17	48.0kg
IT5.0R	4.90m (16'1")	12.40m (40'8")	19	58.0kg
IT5.5R	5.40m (17'9")	13.90m (45'7")	21	64.0kg

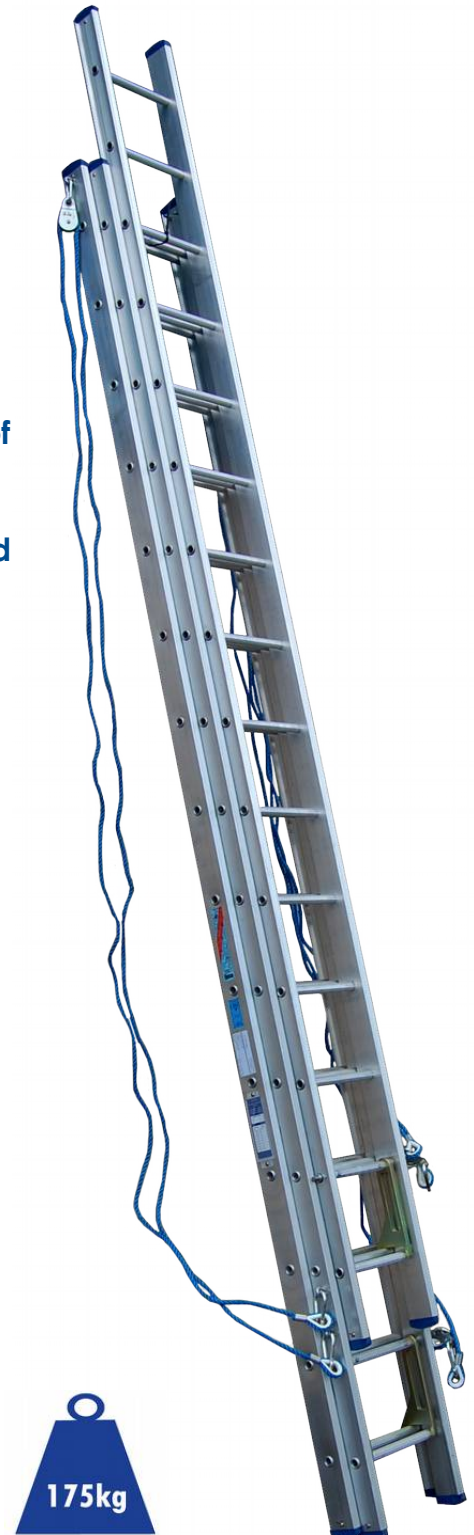

Ref: IDTR_170126